

SERVICE INFORMATION



Number: 010-1841

Year: 1997

Month: OCTOBER

Market: ALL

Incorrect colour coding of connectors in service manuals

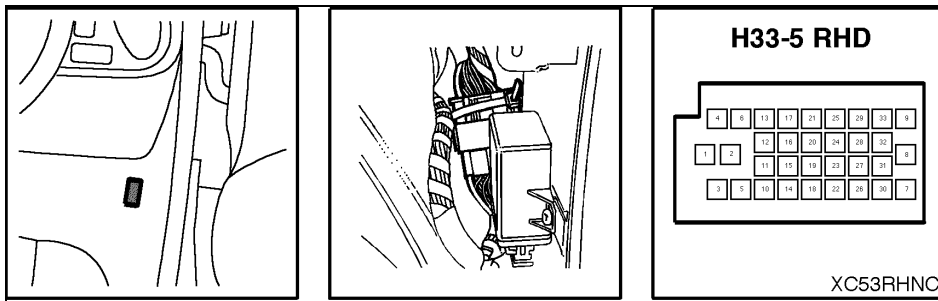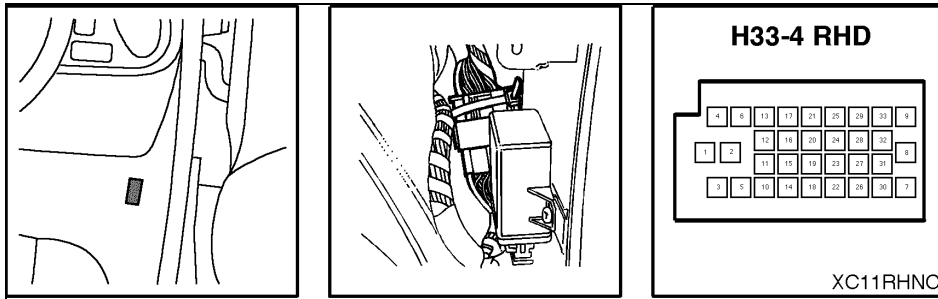

Background

From M1996, the 10-pin connector H10-9 between the instrument harness and the engine harness on the Saab 900 was changed to the 33-pin connector H33-5.

The colours of the two connectors H33-4 and H33-5 (both LHD and RHD) were exchanged in all the service manuals.

Procedure

Insert the text below into the Service Manual 3:2 Wiring diagrams (and any other manuals where connectors are present) from M1996:

H33-4	LHD: Black connector on bulkhead behind glove box RHD: Black connector under engine control module
H33-5	LHD: Grey connector on bulkhead behind glove box. RHD: Grey connector under engine control module